


RZR Pro S 4 Sport Storm Gray

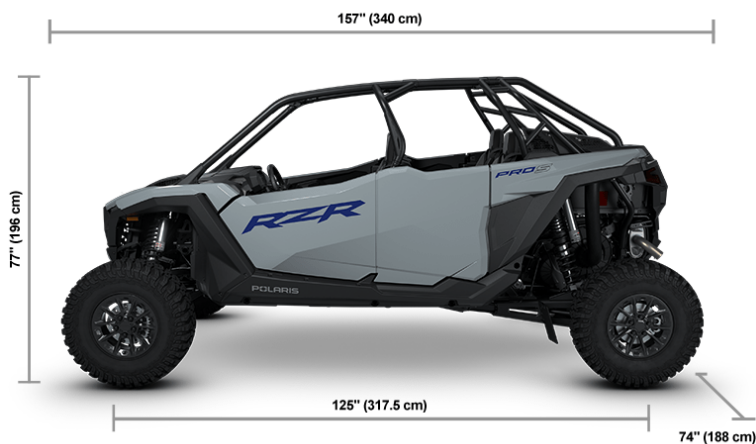

Key Specifications

181	74"	16"
HP	WIDTH	GROUND CLEARANCE

ENGINE & DRIVETRAIN

Cooling	Liquid
Cylinders Displacement	925 cc
Drive System Type	Isolated Xtreme Performance true on-demand AWD/2WD
Driveline Features	Not equipped
Engine Type	4-stroke DOHC twin-cylinder turbocharged
Fuel System/Battery	Electronic fuel injection
Horsepower	181
Transmission/Final Drive	Automatic PVT P/R/N/L/H

DIMENSIONS

Bed Box Dimensions (L x W x H)	26 x 17.7 x 11.5" (66 x 45 x 29.2 cm)
Box Capacity	300 lbs. (136.1 kg)
Curb Weight	2,085 lbs. (946kg) CA 2,092 lbs. (949 kg)
Estimated Dry Weight	1,995 lbs. (905 kg) CA 2,002 lbs. (908 kg)
Fuel Capacity	13 gal. (49.2 L)
Ground Clearance	16" (40.6 cm)
Hitch Type	Not Equipped
Overall Vehicle Size (L x W x H)	157 x 74 x 77" (340 x 188 x 196 cm)
Payload Capacity	1,160 lbs. (526 kg)
Person Capacity	4
Towing Capacity	N/A
Wheelbase	125" (317.5 cm)

BRAKES

Front/Rear Brakes	4-wheel hydraulic disc with triple-bore front and dual-bore rear calipers; aluminum top hat rotor
Parking Brake	Park in-transmission

TECHNOLOGY

Audio System	Not equipped, accessory options available
Connected Vehicle Services	Not equipped, accessory options available
Rear Camera	Not equipped
Security	Polaris P.A.S.S. anti-theft system
Touch Screen Display	Not equipped, accessory options available

WHEELS & TIRES

Front Tires	32 x 10-15" Pro Armor Trekker; wheel size 15" x 7
Rear Tires	32 x 10-15" Pro Armor Trekker; wheel size 15" x 7
Tire Ply Rating	8-ply
Wheels	15" cast aluminum rim with 5-lug pattern

SUSPENSION

Electronic Suspension Control System	Not equipped
Front Shocks	Walker Evans® 2.5" velocity needle shock with 16-position adjustable clickers
Front Suspension	Lightweight boxed dual A-arm with 3-piece stabilizer bar and 27" (68.6 cm) usable travel, 22.25" (56.5 cm) wheel travel, unitized hubs
Rear Shocks	Walker Evans® 3" velocity needle shock with 16-position adjustable clickers
Rear Suspension	Tubular trailing arm with boxed gusseting and toe link, high-clearance radius rods, stabilizer bar, 28.3" (71.9 cm) usable travel, 22.4" (56.9 cm) wheel travel, unitized hubs

EXTERIOR FEATURES

Cargo System	Lock & Ride
Door Type	Half doors
Vehicle Protection	Not equipped
Winch	Not equipped

LIGHTING & ELECTRICAL

--

Electrical System	High-output 900-W charging system @ 3,000 RPM
Lighting	White LED low/high and red LED tail/brake lights.

COMFORT & CONVENIENCE

Cab Components	Half doors
Drive Modes	Not equipped
Driver Instrumentation	Driver Forward Information Center with 4" color display + rotary speedometer & tachometers, programmable service intervals, speedometer, tachometer, odometer, tripmeter, clock, hour meter, gear indicator, fuel gauge, coolant temperature, voltmeter, service indicator and codes, seat belt reminder light, gear indicator, DC outlet, Polaris P.A.S.S anti-theft system
Electronic Power Steering	Rack-mounted high-assist electronic power steering with quick-turn rack.
Heat and/or Air Conditioning	Not equipped
Ride Control	Not equipped
Seat Type	Bolstered bucket seats with driver- and passenger-4-way adjustability (including 6" front-to-back tool-less seat slider with tilt adjustability); Sub-Zero 4-point harness; rear stadium-style seating with Sub-Zero 4-point harness.
Speed Limiting	Not equipped
Steering	Standard steering wheel with tilt adjustment