


RZR Pro S 4 Sport Sand Dune

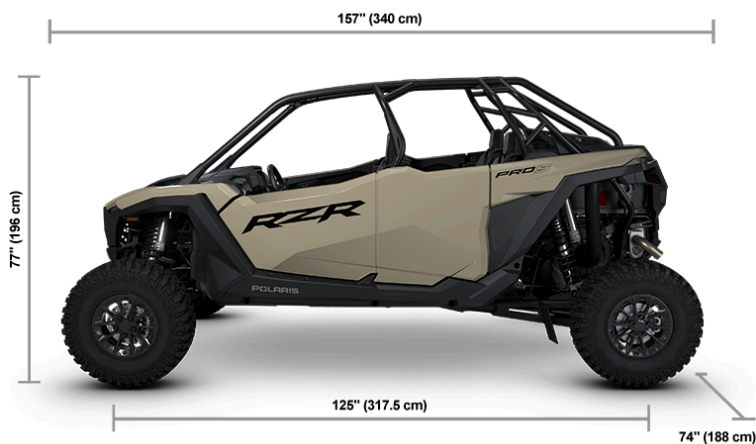

Key Specifications

| | | |
|-----|-------|------------------|
| 181 | 74" | 16" |
| HP | WIDTH | GROUND CLEARANCE |

ENGINE & DRIVETRAIN

| | |
|--------------------------|--|
| Cooling | Liquid |
| Cylinders Displacement | 925 cc |
| Drive System Type | Isolated Xtreme Performance true on-demand AWD/2WD |
| Driveline Features | Not equipped |
| Engine Type | 4-stroke DOHC twin-cylinder turbocharged |
| Fuel System/Battery | Electronic fuel injection |
| Horsepower | 181 |
| Transmission/Final Drive | Automatic PVT P/R/N/L/H |

DIMENSIONS

| | |
|----------------------------------|--|
| Bed Box Dimensions (L x W x H) | 26 x 17.7 x 11.5" (66 x 45 x 29.2 cm) |
| Box Capacity | 300 lbs. (136.1 kg) |
| Curb Weight | 2,085 lbs. (946kg) CA 2,092 lbs. (949 kg) |
| Estimated Dry Weight | 1,995 lbs. (905 kg) CA 2,002 lbs. (908 kg) |
| Fuel Capacity | 13 gal. (49.2 L) |
| Ground Clearance | 16" (40.6 cm) |
| Hitch Type | Not Equipped |
| Overall Vehicle Size (L x W x H) | 157 x 74 x 77" (340 x 188 x 196 cm) |
| Payload Capacity | 1,160 lbs. (526 kg) |
| Person Capacity | 4 |
| Towing Capacity | N/A |
| Wheelbase | 125" (317.5 cm) |

BRAKES

| | |
|-------------------|---|
| Front/Rear Brakes | 4-wheel hydraulic disc with triple-bore front and dual-bore rear calipers; aluminum top hat rotor |
| Parking Brake | Park in-transmission |

TECHNOLOGY

| | |
|----------------------------|---|
| Audio System | Not equipped, accessory options available |
| Connected Vehicle Services | Not equipped, accessory options available |
| Rear Camera | Not equipped |
| Security | Polaris P.A.S.S. anti-theft system |
| Touch Screen Display | Not equipped, accessory options available |

WHEELS & TIRES

| | |
|-----------------|---|
| Front Tires | 32 x 10-15" Pro Armor Trekker; wheel size 15" x 7 |
| Rear Tires | 32 x 10-15" Pro Armor Trekker; wheel size 15" x 7 |
| Tire Ply Rating | 8-ply |
| Wheels | 15" cast aluminum rim with 5-lug pattern |

SUSPENSION

| | |
|--------------------------------------|--|
| Electronic Suspension Control System | Not equipped |
| Front Shocks | Walker Evans® 2.5" velocity needle shock with 16-position adjustable clickers |
| Front Suspension | Lightweight boxed dual A-arm with 3-piece stabilizer bar and 27" (68.6 cm) usable travel, 22.25" (56.5 cm) wheel travel, unitized hubs |
| Rear Shocks | Walker Evans® 3" velocity needle shock with 16-position adjustable clickers |
| Rear Suspension | Tubular trailing arm with boxed gusseting and toe link, high-clearance radius rods, stabilizer bar, 28.3" (71.9 cm) usable travel, 22.4" (56.9 cm) wheel travel, unitized hubs |

EXTERIOR FEATURES

| | |
|--------------------|--------------|
| Cargo System | Lock & Ride |
| Door Type | Half doors |
| Vehicle Protection | Not equipped |
| Winch | Not equipped |

LIGHTING & ELECTRICAL

| |
|--|
| |
|--|

| | |
|--------------------------|---|
| Electrical System | High-output 900-W charging system @ 3,000 RPM |
| Lighting | White LED low/high and red LED tail/brake lights. |

COMFORT & CONVENIENCE

| | |
|-------------------------------------|--|
| Cab Components | Half doors |
| Drive Modes | Not equipped |
| Driver Instrumentation | Driver Forward Information Center with 4" color display + rotary speedometer & tachometers, programmable service intervals, speedometer, tachometer, odometer, tripmeter, clock, hour meter, gear indicator, fuel gauge, coolant temperature, voltmeter, service indicator and codes, seat belt reminder light, gear indicator, DC outlet, Polaris P.A.S.S anti-theft system |
| Electronic Power Steering | Rack-mounted high-assist electronic power steering with quick-turn rack. |
| Heat and/or Air Conditioning | Not equipped |
| Ride Control | Not equipped |
| Seat Type | Bolstered bucket seats with driver- and passenger-4-way adjustability (including 6" front-to-back tool-less seat slider with tilt adjustability); Sub-Zero 4-point harness; rear stadium-style seating with Sub-Zero 4-point harness. |
| Speed Limiting | Not equipped |
| Steering | Standard steering wheel with tilt adjustment |